



**OPERATING
TABLE**

**OPERATING
LIGHT**

**SINCE
2000**


Our OT equipment are renowned globally for their superior performance, reflecting our commitment to innovation and customer satisfaction.



**Supporting
Make in India**



Our Installations

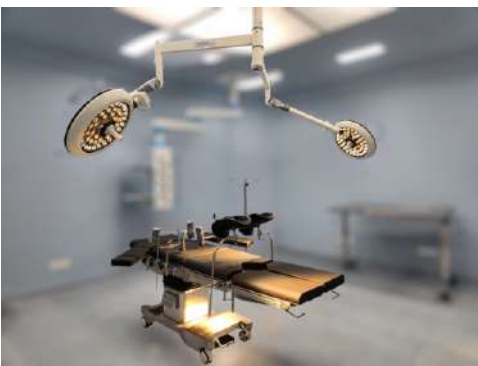

& Many More.....

Our Valuable Customers



& Many More.....

OPERATING TABLE

Our precision-engineered operating Surgical Tables are C-arm Compatible, adjustable, and boast an ergonomic design, guaranteeing accuracy and comfort during various surgical procedures.

- Crafting meticulously designed surgical tables, prioritizing comfort in every detail, aligning with our motto 'comfort' in every bar, ensuring superior support



SV-301
(GENERAL SURGERY
HYDRAULIC
O.T. TABLE)



TECHNICAL DATA

Length of Table	1945 mm
Width of Table Top	500 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

SPECIAL FEATURES

- ▶ Center Pillar
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.



CHAIR POSITION

SV-301 (G) GYNECOLOGICAL TABLE (HYDRAULIC O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Leg Section	0°-90°
Trendelenburg	±20°
Back Section	±70°
Floor Locking System	Manual

SPECIAL FEATURES

- Obstetrics operating room table perfect for all kinds of gynecological operations.
- The cover for base and column is made of 304 stainless steel, good performance on anti-rust and easy to clean.

STANDARD ACCESSORIES

- Arm Rest-2 Pcs
- Birth Handle- 2 Pcs
- Mattress
- Gynae Tray

SILENT FEATURES

- Functional and Versatile
- Flexibility and precision
- Hygienic Design
- Easy cleaning
- User-friendly

COLOR OPTIONS



Black Blue Pink



Gynae Tray



Birthing Handle

SV-301 (GR) GYNECOLOGICAL TABLE (ELECTRIC O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Leg Section	0°-90°
Trendelenburg	±20°
Back Section	±70°
Floor Locking System	Manual

SPECIAL FEATURES

- Obstetrics operating room table perfect for all kinds of gynecological operations.
- The cover for base and column is made of 304 stainless steel, good performance on anti-rust and easy to clean.

STANDARD ACCESSORIES

- Arm Rest-2 Pcs
- Birth Handle- 2 Pcs
- Mattress
- Gynae Tray

SILENT FEATURES

- Functional and Versatile
- Flexibility and precision
- Hygienic Design
- Easy cleaning
- User-friendly

COLOR OPTIONS



Black Blue Pink



Gynae Tray



Birthing Handle



Foot Switch (optional)

SV-302 (C) (C-ARM COMPATIBLE HYDRAULIC O.T TABLE)

STEEL QUALITY MEDICAL
GRADE STAINLESS STEEL



TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

SPECIAL FEATURES

- ▶ Eccentric Pillar.
- ▶ Stainless Fitting.
- ▶ Detachable, head, leg & Pelvic section.
- ▶ In built kidney bridge.
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.



SV-302 (SE)
(C-ARM COMPATIBLE
SEMI-ELECTRIC
O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



ADDITIONAL ELECTRIC
UP & DOWN

TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

SPECIAL FEATURES

- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning

OPTIONAL FEATURES



BATTERY
BACKUP

SV-303 (R) (C-ARM COMPATIBLE ELECTRIC O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



INBUILT
BATTERY BACKUP



WIRED
REMOTE

TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

TABLE POSITION

- ▶ Height Adjustment - Up & Down.
- ▶ Lateral Tilt - Left & Right.
- ▶ In built Kidney Bridge.
- ▶ Trendelenburg & Reverse Trendelenburg.
- ▶ Flex Position & Reflex Position.

SPECIAL FEATURES

- ▶ Eccentric Pillar.
- ▶ Stainless Fitting.
- ▶ Detachable, head, leg & Pelvic section.
- ▶ In built kidney bridge.
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

OPTIONAL FEATURES



Low Height



SLIDING TOP

SV-303 (R&N) (C-ARM COMPATIBLE ELECTRIC O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



ADDITIONAL
CONTROL PANEL



MEMORY
FUNCTION



ZERO
POSITION



INBUILT
BATTERY BACKUP



WIRED
REMOTE



TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

TABLE POSITION

- ▶ Height Adjustment - Up & Down.
- ▶ Lateral Tilt - Left & Right.
- ▶ In built Kidney Bridge.
- ▶ Trendelenburg & Reverse Trendelenburg.
- ▶ Flex Position & Reflex Position.

OPTIONAL FEATURES



Low Height



SLIDING TOP

SPECIAL FEATURES

- ▶ SMPS based control box.
- ▶ Can handle better Voltage Fluctuations.
- ▶ When idle has zero current consumption and saves power, these are as per new European and American standards where the idle power consumption should be zero and where transformer based systems are outdated.
- ▶ Handset and additional control panel.
- ▶ Indication of battery back provided in the second handset.
- ▶ The Control panel has 2 memory functions.
- ▶ The second handset has also safety key to lock the complete handset.
- ▶ Indication of battery back in the second hand set.
- ▶ The handset is designed with back LED indicator for better visibility .
- ▶ This is the only handset with Back-light features.

SALIENT FEATURES

- ▶ Eccentric Pillar.
- ▶ Stainless Fitting.
- ▶ Detachable, head, leg & Pelvic section.
- ▶ In built kidney bridge.
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

SV-304 (E&M) (C-ARM COMPATIBLE ELECTRIC & MANUAL O.T TABLE)

O.T Table operated manually
through Remote, Nurse panel &
have battery backup

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



-  ADDITIONAL CONTROL PANEL
-  MEMORY FUNCTION
-  ZERO POSITION
-  INBUILT BATTERY BACKUP
-  WIRED REMOTE
-  Manual Override

TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

TABLE POSITION

- ▶ Height Adjustment - Up & Down.
- ▶ Lateral Tilt - Left & Right.
- ▶ In built Kidney Bridge.
- ▶ Trendelenburg & Reverse Trendelenburg.
- ▶ Flex Position & Reflex Position.

OPTIONAL FEATURES



SLIDING TOP



Low Height

SPECIAL FEATURES

- ▶ SMPS based control box.
- ▶ Can handle better Voltage Fluctuations.
- ▶ When idle has zero current consumption and saves power, these are as per new European and American standards where the idle power consumption should be zero and where transformer based systems are outdated.
- ▶ Handset and additional control panel.
- ▶ Indication of battery back provided in the second handset.
- ▶ The Control panel has 2 memory functions.
- ▶ The second handset has also safety key to lock the complete handset.
- ▶ Indication of battery back in the second hand set.
- ▶ The handset is designed with back LED indicator for better visibility .
- ▶ This is the only handset with Back-light features.

SALIENT FEATURES

- ▶ Eccentric Pillar.
- ▶ Stainless Fitting.
- ▶ Detachable, head, leg & Pelvic section.
- ▶ In built kidney bridge.
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

SV-304 (E&M) ADVANCE (C-ARM COMPATIBLE ELECTRIC & MANUAL O.T TABLE ADVANCE)

O.T Table operated manually through Remote, Nurse panel & have battery backup

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



MEMORY
FUNCTION



ADDITIONAL
CONTROL PANEL



MANUAL
OVERRIDE



ZERO
POSITION



INBUILT
BATTERY
BACKUP



WIRED
REMOTE



SLIDING
TOP

TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	+20°
Back Section	+70°
Head Section	+60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking

SPECIAL FEATURES

- ▶ Zero position facility high i.e by passing the single button OT table will come to normal position.
- ▶ Patient reverse orientation mode when head and legs section are interchanged.
- ▶ 2 memory function in control panel.
- ▶ Indication of battery back in the second hand set.
- ▶ The handset is designed with back LED indicator for better visibility .
- ▶ Head and foot section is manually operated by the means of Ratchet System.
- ▶ Stainless steel covered base and column covers for easy cleaning and hygiene.
- ▶ Anti Bacterial and Anti Fungal Mattress.

SMPS based control box which can handle better voltage fluctuations, when SMPS is idle there is zero current Consumption and saves power there are as for new European and American standards where the idle power consumption should be zero and where transformer based systems are outdated.

We provide remote which is ergonomically designed to have an easy and better grip with spiral cable and it has LED backlit switch with symbolic position figures making it convenient to use even in the dark.

SILENTE FEATURES

- ▶ Sliding Top.
- ▶ Nurse Panel.
- ▶ Split Leg Section.
- ▶ Floor Locking.
- ▶ Weight Capacity .
- ▶ Compatible with C-Arm.
- ▶ Lockable swivel Castor wheels.
- ▶ Zero Position (In One Touch).
- ▶ Function Locking System .
- ▶ Dual Memory Setup.
- ▶ Gas Spring (Leg Section).
- ▶ Stainless Fitting-Detachable Head, Leg & Pelvic Section.
- ▶ In built Kidney Bridge.
- ▶ Five Sectional Radio-Translucent Top.
- ▶ Base & Cover made of attractive, Easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, Step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

SV-305 (EH) (ELECTRO HYDRAULIC OT TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



BASED ON HYDRAULIC
CYLINDER OPERATIONS



INBUILT
BATTERY BACKUP

TECHNICAL DATA

Length of Table	2000 mm
Width of Table Top	540 mm
Height Adjustment	750mm-1000mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	+20°
Back Section	+70°
Head Section	+60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking

SPECIAL FEATURES

- ▶ Engineered for increasingly complex surgical scenes, Comfort EHO comes with extreme loads in any position. The modular structure enables it to be adapted to match the size of the patient and in no time at all it can be equipped for any surgical discipline. With the characteristics of high automation low noise and high reliability, Comfort EHO can be regarded as an ideal electro-hydraulic operating table.
- ▶ Modular design tabletop tailored for various surgical discipline needs. The easy click new mounting point enables the table adapted to wide variety of surgery and patient's height, waterproof design Mattress.
- ▶ Extreme weight load capacity of 300 kg with highest safety and stability.
- ▶ Standard override panel control makes the control safer.

SILENTE FEATURES

- ▶ Split Leg Section.
- ▶ Stainless Fitting.
- ▶ Sliding Top.
- ▶ Detachable : head, leg & pelvic section.
- ▶ In built kidney bridge.
- ▶ Five sectional radio – Translucent Top.
- ▶ Base & Cover mode of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

SV-304 (E&M) B.T BARIATRIC TABLE

(C-ARM COMPATIBLE
ELECTRIC O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



-  ADDITIONAL CONTROL PANEL
-  MEMORY FUNCTION
-  ZERO POSITION
-  INBUILT BATTERY BACKUP
-  WIRED REMOTE
-  Manual Override

TECHNICAL DATA

Length of table	1910 mm
Width of table top	550 mm
Width of table top with Width Extender	800 mm
Height Adjustment	750-1000 mm
Trendelenburg	30°
Reverse Trendelenburg	60°
Lateral Tilt	± 20°
Back Section	60°
Head Section	60°
Leg Section	0°-90°
Floor Locking System	Manual & Electric

TABLE POSITION

- ▶ Height Adjustment - Up & Down.
- ▶ Lateral Tilt - Left & Right.
- ▶ In built Kidney Bridge.
- ▶ Trendelenburg & Reverse Trendelenburg.
- ▶ Flex Position & Reflex Position.

OPTIONAL FEATURES



SLIDING TOP

SPECIAL FEATURES

- ▶ Resistant against thermal, long service life, Rigid construction.
- ▶ Four section Ecentrically positioned Radio-Translucent table top.
- ▶ Complete table is operated by remote & nursing panel.
- ▶ Frame work under radiolucent top is of S.S .
- ▶ Base & Cover made of attractive easy to clean stainless steel.
- ▶ Table have battery backup to operate positions.
- ▶ Memory function & Zero position option on nurse panel.

SALIENT FEATURES

- ▶ Table will be provided with split leg.
- ▶ Also provided with extra manual locking feature for better stability.
- ▶ Provided with 4nos of width Extender.
- ▶ Table is also lock through hand remote & nurse panel.

STANDARD ACCESSORIES

- ▶ Arm Board - 2 nos
- ▶ Arm Board locking clamps - 2 nos
- ▶ Foot rest for leg section - 2 nos
- ▶ Body Strap - 2 nos
- ▶ Leg Strap - 2 nos



Height Adjustment - Down



Height Adjustment - Up



Lateral Tilt - Left



Lateral Tilt - Right



Trendelenburg



Reverse Trendelenburg



Flex Position



Gynec Position

SV-306 OPHTHALMIC TABLE (ELECTRIC O.T TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



ELECTRIC UP & DOWN
BY WIRED REMOTE

TECHNICAL DATA

Length of Table	1800 mm
Width of Table Top	530 mm
Height Adjustment	750mm-1000mm
Leg Section	0°-90°

SPECIAL FEATURES

- ▶ This Ophthalmic Table is specially designed for ophthalmic surgery.
- ▶ Three sectional table is provided with drainage system in the head section.
- ▶ The table has sturdy base, column made up of stainless steel, antibacterial and is easy to clean.
- ▶ Electromotive height with the help of lightweight handheld control unit.

STANDARD ACCESSORIES

- ▶ Anesthetic Screen
- ▶ IV Pole
- ▶ Hand Rest
- ▶ Mattress

SILENT FEATURES

- ▶ Stainless Fitting
- ▶ Detachable, head, & leg section.
- ▶ Three Sectional Radio Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.

OPTIONAL FEATURES



Foot Switch (optional)



Instrument Tray (optional)

SV-307

ANIMAL TABLE (ELECTRIC ANIMAL O.T. TABLE)

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL



FOOT SWITCH
(OPTIONAL)



BATTERY
BACKUP



TECHNICAL DATA

Length of Table	1220mm
Width of Table Top	610mm
Minimum Height	660mm
Maximum Height	915mm

STANDARD ACCESSORIES

- ▶ IV Pole
- ▶ Drainage Pipe

SPECIAL FEATURES

- ▶ Electric up and down function.
- ▶ It is suitable for small animal's operation, such as sheep, dog etc.
- ▶ It is reasonable structured, tight, high performance, easy operation and has very strong practicability.
- ▶ Fully made of Premium Grade 304 Stainless Steel, it is heat-resistant, corrosion protective and rustproof.
- ▶ The surface of the table-top is V shaped and is smooth and easy to clean and disinfect, thus, it can avoid cross infection
- ▶ Equipped with fluid collecting through system

NEURO ATTACHMENT

STEEL QUALITY 304 MEDICAL
GRADE STAINLESS STEEL




SPECIAL FEATURES


- We are ranked as one of the leading manufacturers, suppliers, exporters, traders and distributors of excellent quality Neuro Surgery Attachments. These neuro surgery attachments provide neuro surgeons stable and excellent support as they perform different medical procedures.
- These neuro surgery attachments are very durable made from excellent quality stainless steel and other materials. We provide ophthalmologic procedures using the narrow headrest, neurology procedures in prone position and supine position (Sugita six pin fixator and Horse Shoe).



**Horse Shoe
Position**

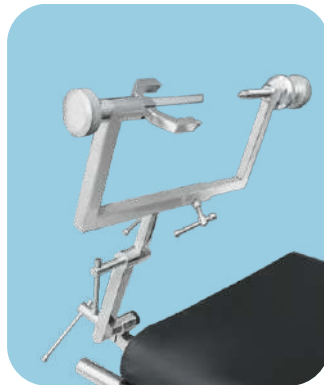

**3 Pin skull
Fixator**

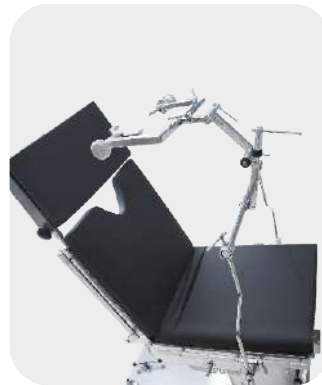

**Fixator for
Sitting Positions**



Horse Shoe

ALBEE'S TYPE ORTHO ATTACHMENT



SPECIAL FEATURES



- ▶ Ortho Attachment allows the table to be used for the lower extremity procedures.
- ▶ Available at competitive prices our ortho attachment is purely made of stainless steel which resist corrosion.

SILENT FEATURES


- ▶ The Orthopedic Attachment can be used with any operating table.
- ▶ In addition, a pelvic support plate is supported on top of the frame and is formed with an asymmetrical construction.
- ▶ Stirring Instruments allows flexion/raising of legs & stirring/string ball joints locked from foot end.
- ▶ Two traction devices on sliding spot with ball joint allowing flexions & rotations of foot with traction shoe with metallic sole.
- ▶ Padded orthopedic knee crutches/provides support to the legs of the patient.

HANGING TYPE ORTHOPEDIC ATTACHMENT



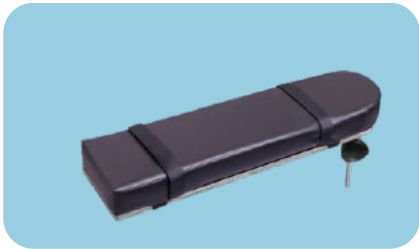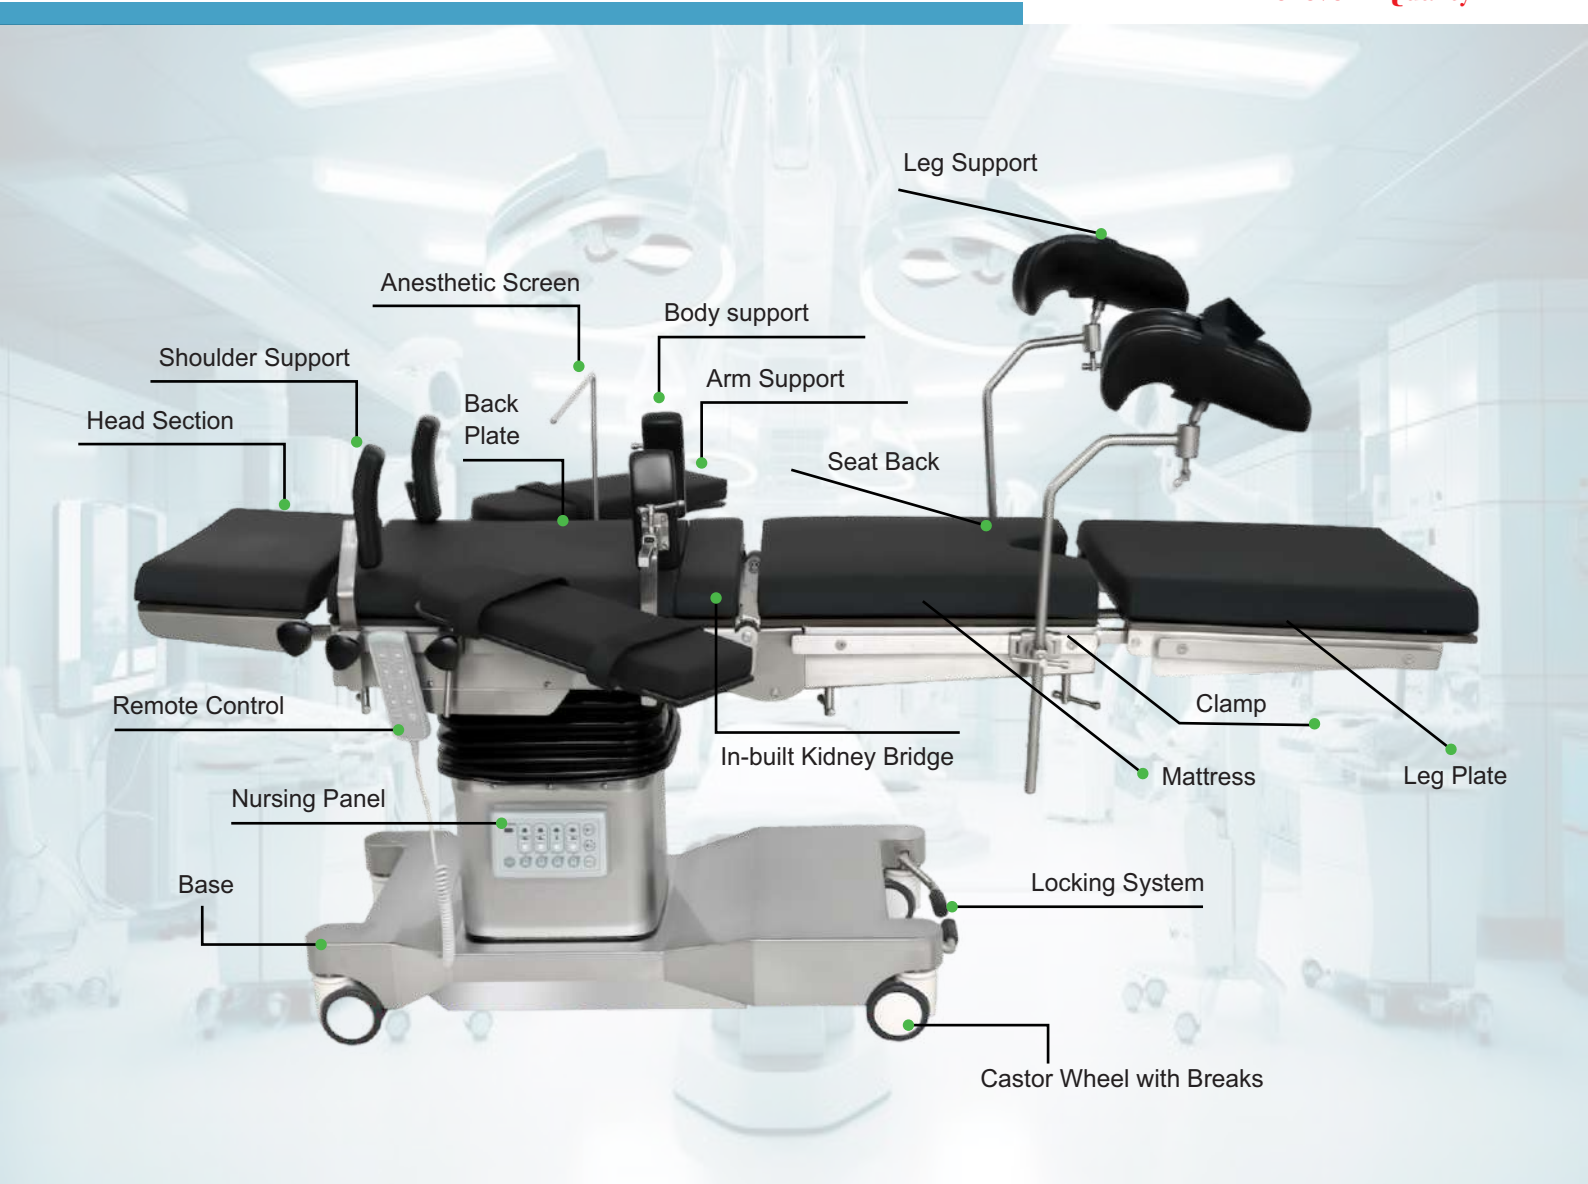

ARM REST

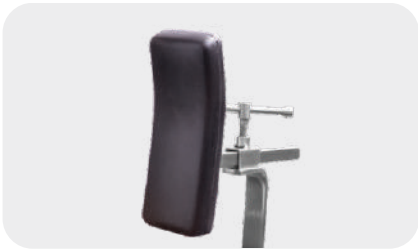

SHOULDER SUPPORT



ANESTHETIC SCREEN




CLAMPS



LEG SUPPORT



MATTRESS



SPLIT LEG SECTION
(OA-1)



RESTRAINT BODY STRAP
(OA-2)



BOLSTER PILLOW
(OA-3)



INSTRUMENT TRAY
(OA-4)



FOOT SUPPORT
(OA-5)



**CERVICAL IN SUPINE/
LAMINECTOMY FRAME**
(OA-6)



HUMERUS SUPPORT
(OA-7)





TABLE LENGTH EXTENSION
(OA-8)



STEINMANN PIN CLAMP HOLDER
(OA-9)



**SPINE SURGERY USING
CUSHION SPINE FRAME**
(OA-10)



RM TRACTION DEVICE / PERINEAL POST
(OA-11)



UROLOGY / GYNAE TRAY
(OA-12)



HORSE SHOE
(OA-13)



KNEE SUPPORT
(OA-14)



FIXATOR FOR SITTING POSITION
(OA-15)



SHOULDER SURGERY
(OA-16)



HAND SURGERY TABLE
(OA-17)



WIDTH EXTENSION
(OA-18)



ARTHROSCOPY ATTACHMENT
(OA-19)



WRISTLET
(OA-20)



X-RAY TOP
allows for inserting X-ray film
cassette from head to foot
(OA-21)



**ORTHOPAEDIC
ATTACHMENT STAND**
(OA-22)



ACCESSORIES STAND
(OA-23)



BATTERY BACKUP
(OA-24)

OPERATING LIGHT

Our precision-engineered operating Surgical Lights are with superior quality Shadowless light & long lasting German LEDs.

- They are designed to enhance surgical precision and comfort by minimizing shadows and providing consistent, clear illumination.



MICRO

MODEL : Micro
Ceiling Double
Dome


Best Solution for Minor
OT/Dermatology, Hair
& Skin Clinics, OPD'S



LED Examination Light with intensity of 100000 LUX & 4300 Kelvin (day light). The entire body is made of Aluminum. It comes with a metallic sterile handle for easy positioning of light head. Anti Static Castors with brakes for better stability.



Sleek Design

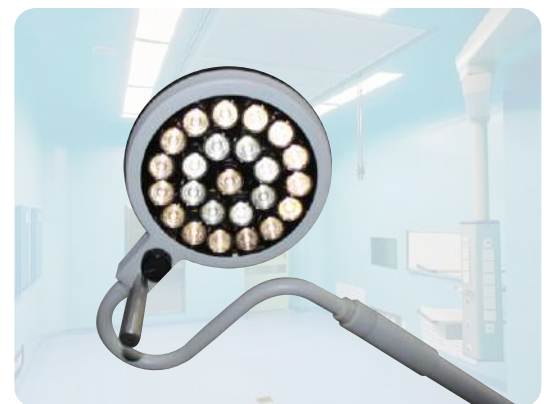

Aerodynamic Shape

Available in Ceiling / Wall mount / Mobile / Optional Battery Backup



Micro Mobile



Micro M with Battery Backup



Micro Ceiling



Micro Wall Mount
(Space Saving Design)

TECHNICAL DATA

› Intensity	100000 Lux Dimmable (Each Dome)
› CCT	4300 Kelvin (Day Light)
› CRI	95 rA
› LEDs	24 (German LEDs)
› Focus	200 mm Fixed
› LED Life	≥ 50000 Hours
› Autoclave Handle	Aluminum Handle

FINE LUX

MODEL : Fine Lux
Ceiling Double
Dome





Fine Lux 55

TECHNICAL DATA

- | | |
|-----------------|----------------------------------|
| › Intensity | 160000 Lux + 160000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA ± 5 rA |
| › LEDs | 60 + 60 German LEDs |
| › Focus | Adjustable 100mm - 250mm |
| › LED Life | > 50000 Hours |
| › Control Panel | Digital with Wireless remote |
| › Power Supply | 220V / 50Hz AC (Hearwell Taiwan) |



Fine Lux 44

TECHNICAL DATA

- | | |
|-----------------|----------------------------------|
| › Intensity | 140000 Lux + 140000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA ± 5 rA |
| › LEDs | 48 + 48 German LEDs |
| › Focus | Adjustable 100mm - 250mm |
| › LED Life | > 50000 Hours |
| › Control Panel | Digital with Wireless remote |
| › Power Supply | 220V / 50Hz AC (Hearwell Taiwan) |



Fine Lux 33

TECHNICAL DATA

- | | |
|-----------------|----------------------------------|
| › Intensity | 100000 Lux + 100000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA ± 5 rA |
| › LEDs | 36 + 36 German LEDs |
| › Focus | Adjustable 100mm - 250mm |
| › LED Life | > 50000 Hours |
| › Control Panel | Digital with Wireless remote |
| › Power Supply | 220V / 50Hz AC (Hearwell Taiwan) |




Fine Lux 5



Fine Lux 4




Fine Lux 3

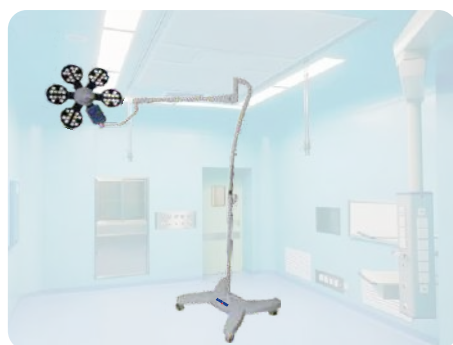

Fine Lux 5M



Fine Lux 4M

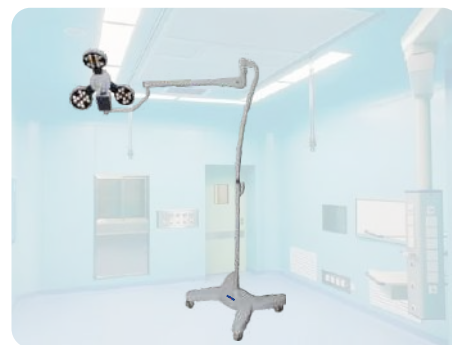

Fine Lux 3M

TECHNICAL DATA


Model	Finelux 5/5M	Finelux 4/4M	Finelux 3/3M
Intensity	160000 Lux	140000 Lux	100000 Lux
CCT	3500k-5000 kelvin	3500k-5000 kelvin	3500k-5000 kelvin
CRI	93 rA + 5rA	93 rA + 5rA	93 rA + 5rA
Focus	Adjustable 100-250mm	Adjustable 100-250mm	Adjustable 100-250mm
LED Life	>5000 Hours	>5000 Hours	>5000 Hours
Control Panel	Digital with wireless remote	Digital with wireless remote	Digital with wireless remote
Power Supply	220V/50Hz AC (Hearwell Taiwan)	220V/50Hz AC (Hearwell Taiwan)	220V/50Hz AC (Hearwell Taiwan)
No. of LEDs	60 German LEDs	48 German LEDs	36 German LEDs

■ Quality First, Service First

- Optional Battery Backup
- Wall Mount Available

PETAL
MODEL : Petal
Ceiling Double
Dome

LED Shadowless Surgical
Lamps

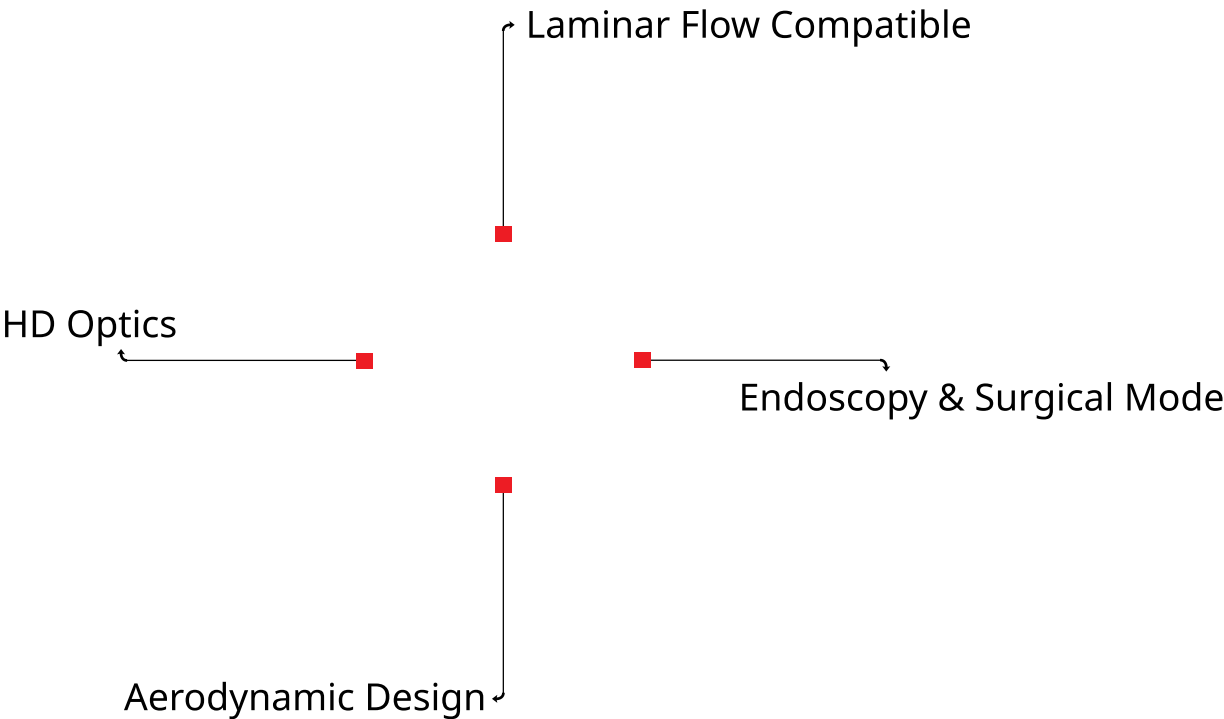

■ Concern Life and Cherish Health



Model : Petal 3

TECHNICAL DATA

- | | |
|-----------------|----------------------------|
| › Intensity | 120000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA $\pm$ 5 rA |
| › LEDs | 64 German LEDs |
| › Focus | Fixed |
| › LED Life | $\geq$ 50000 Hours |
| › Control Panel | Digital with Window remote |
| › Power Supply | 220V / 50Hz AC |



Model : Petal 4

TECHNICAL DATA

- | | |
|-----------------|----------------------------|
| › Intensity | 160000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA $\pm$ 5 rA |
| › LEDs | 80 German LEDs |
| › Focus | Fixed |
| › LED Life | $\geq$ 50000 Hours |
| › Control Panel | Digital with Window remote |
| › Power Supply | 220V / 50Hz AC |



Model : Petal 3M

Petal
is
Portable



Model : Petal 4M



Model : Petal 3Dome



■ Wireless operation

■ Laminar Flow Compatible

Petal Series adap ts latut technology with finland optics, bulks from Germany alongwith front safety glass from Mitsubishi Japan.



Model : Petal 4 Dome



Endoscopy Mode



Model : Petal 43

TECHNICAL DATA

- | | |
|-----------------|----------------------------|
| › Intensity | 160000 Lux + 120000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA $\pm$ 5 rA |
| › LEDs | 80+64 German LEDs |
| › Focus | Fixed |
| › LED Life | $\geq$ 50000 Hours |
| › Control Panel | Digital with Window remote |
| › Power Supply | 220V / 50Hz AC |



Model : Petal 44

TECHNICAL DATA

- | | |
|-----------------|----------------------------|
| › Intensity | 160000 Lux + 160000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA $\pm$ 5 rA |
| › LEDs | 80+80 German LEDs |
| › Focus | Fixed |
| › LED Life | $\geq$ 50000 Hours |
| › Control Panel | Digital with Window remote |
| › Power Supply | 220V / 50Hz AC |



Model : Petal 33

TECHNICAL DATA

- | | |
|-----------------|----------------------------|
| › Intensity | 120000 Lux + 120000 Lux |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA $\pm$ 5 rA |
| › LEDs | 64+64 German LEDs |
| › Focus | Fixed |
| › LED Life | $\geq$ 50000 Hours |
| › Control Panel | Digital with Window remote |
| › Power Supply | 220V / 50Hz AC |


MACRO

MODEL : Macro
Ceiling Double
Dome

Truly Shadowless



Model : Macro 500/500

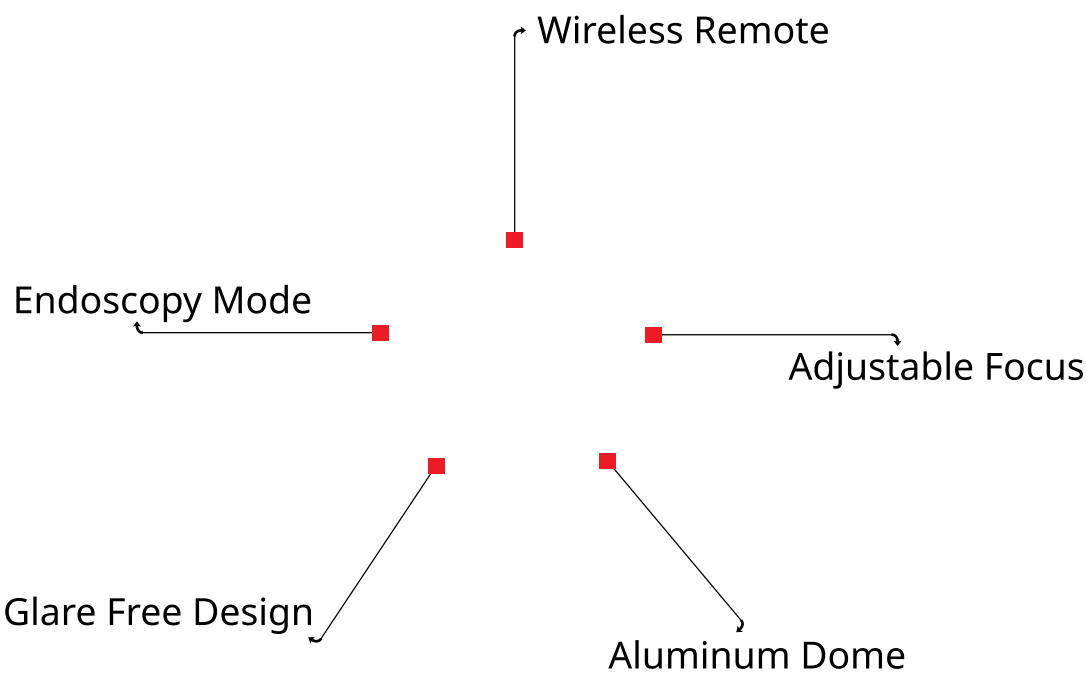



**Model : Macro 500 M
(Optional Battery Backup)**



Model : Macro 500



ENDO MODE

TECHNICAL DATA

Model	Macro 500/500	Macro 500
Intensity	150000 + 150000 Lux	150000 Lux
Focus	100-250mm	100-250mm
CRI	95 rA	95 rA
CCT	Variable 3500-5200 Kelvin	Variable 3500-5200 Kelvin
Modes	Endoscopy Mode / Surgical Mode	
Controller	Digital Feather Touch with Wireless Remote	
No. of LEDs	48 + 48 German LEDs	48 German LEDs
Arms	Hassle Free 360° Rotation	Hassle Free 360° Rotation

GLOW

MODEL : Glow
Ceiling Double
Dome

Shadowless Surgical
Lamps



Model : Glow 60/60 Double Head

Single Head



Model : Glow 60

FEATURES

- Aluminum Body
- Aerodynamic Shape
- Low Temperature
- 360° Rotation System
- Wireless Remote
- German LEDs
- Dome Dia : 600mm
- Taiwan Power Supply
- Endoscopy Mode

TECHNICAL DATA

- | | |
|-----------------|--------------------------------------|
| › Intensity | 160000 Lux (Each Dome) |
| › CCT | 3500K - 5000 Kelvin |
| › CRI | 93 rA $\pm$ 5 rA |
| › LEDs | 72 German LEDs(3 colour combination) |
| › Focus | Adjustable 100mm - 250mm |
| › LED Life | $\geq$ 50000 Hours |
| › Control Panel | Digital with Wireless remote |
| › Power Supply | 220V / 50Hz AC (Hearwell Taiwan) |

SPECIAL FEATURES

- Wireless Remote Control
- 360° Hassle Free Rotation System

Available with HD Camera & Monitor

- Quality First, Service First

SIX SIGMA

(Twin Light)

MODEL : Six Sigma
Ceiling Double
Dome

Shadowless Surgical
Lamps



TECHNICAL DATA

› Intensity	130000 X 2 Lux
› CCT	3800 - 5200 Kelvin
› CRI	91 rA
› Depth illumination	10 - 15 cm
› Focus	Fixed
› LED Life	≥ 50000 Hours
› Spot Diameter	450-500mm
› Power Supply	220V / 50Hz AC
› No. of LEDs	36 x 2 German LEDs
› Intensity Control	10 - 100 Digital
› Power	60 Watt X 2
› Diameter of Light	470 mm x 2

SPECIAL FEATURES

Wireless Remote Control
360° Hassle Free Rotation System

SIX SIGMA (M)

Truly Shadowless



TECHNICAL DATA

› Intensity	140000 Lux
› CCT	3800-5200k
› CRI	91 rA
› Depth illumination	10 - 15 cm
› Focus	Fixed
› LED Life	≥ 50000 Hours
› Spot Diameter	450-500mm
› Power Supply	220V / 50Hz AC
› No. of LEDs	36 German LEDs
› Intensity Control	10 - 100 Digital
› Power	60 Watt
› Diameter of Light	470mm

SPECIFICATION

The mobile six sigma light systems are the perfect portable light system for clinics that look for more than a standard examination light.

SIX SIGMA LED OT LIGHT

Truly Shadowless



SPECIFICATION

Six sigma is especially recommended for operating theaters where the surgeon needs a ceiling lamp to avoid interference with other overhead equipment.



DIGITAL CONTROLLER

APPLE SPOT EXAMINATION LIGHT

Truly Shadowless



TECHNICAL DATA

› Intensity	50000 Lux
› CCT	4350 Kelvin
› CRI	95 rA
› Depth illumination	10 - 15 cm
› Focus	Fixed
› LED Life	≥ 50000 Hours
› Spot Diameter	200 mm
› Power Supply	220V / 50Hz AC
› No. of LEDs	12 German LEDs
› Intensity Control	10 - 100 Digital
› Power	12 Watt
› Diameter of Light	200 mm

SI-7 SPOT EXAMINATION LIGHT

Truly Shadowless



TECHNICAL DATA

› Intensity	25000 Lux
› CCT	4350 Kelvin
› CRI	95 rA
› Depth illumination	10 - 15 cm
› Focus	Fixed
› LED Life	≥ 50000 Hours
› Spot Diameter	100 - 150 mm
› Power Supply	220V / 50Hz AC
› No. of LEDs	7 German LEDs
› Intensity Control	10 - 100 Digital
› Power	9 Watt
› Diameter of Light	200 mm

GET IN TOUCH

Mobile: +91-9313292265

Mobile: +91-9911082876

Mobile: +91-7289080726

Email: sanvinindia@gmail.com

Manufacturing Units

Mfg. Unit : _____

G/f, Back Side Plot At Kh. No-12/5
Village Nangli Sakrawati Opp.
Radha Kishan Dharam Kata
Najafgarh , New Delhi - 110043

For More info, Please visit:
www.sanvinindia.com

